

550W / 650W / 750W / 850W



Introduction

The FSP DAGGER PRO features with standard SFX size and included ATX adapter bracket to help users easily install an SFX power supply into an ATX, Micro-ATX or Mini-ITX chassis. With this compact size but comes with powerful output, especially the +12V single-rail offers VGA cards full power individually and to avoid any overloading conditions. Besides, the fully modular and all black cable design save your system an optimal airflow space and easy to make a cable management for a polished look.

DAGGER PRO series lineup 2 new wattage now, there are 4 different power output options to choose from 550W, 650W, 750W and 850W.

Features



Semi-fanless Design

To spin over 20% loading that makes optimal cooling and reduces noise.



+12V Single Rail Design

Designed for power-intensive VGA cards, provides strong power to any overloading condition.



DC - DC Module

Providing high efficient, stable power.



SFX to ATX Adapter Bracket


Helps users easily install an SFX power supply into an ATX, Micro-ATX or Mini-ITX chassis.

- · Compliance with newest SFX12V V3.3
- · Efficiency \geq 90% at typical load
- · MIA IC™ (Multiple Intelligence Ability) chip set inside
- · Semi-fanless design for silent operation
- · Quiet and long-lasting 92mm ball bearing fan
- · Ribbon cables for the need of enthusiasts
- · Powerful single +12V rail design
- · Japanese electrolytic capacitors
- · Intel Latest CPU ready
- · Full protections OCP, OVP, SCP, OPP, OTP



550W / 650W / 750W / 850W

Product Overview

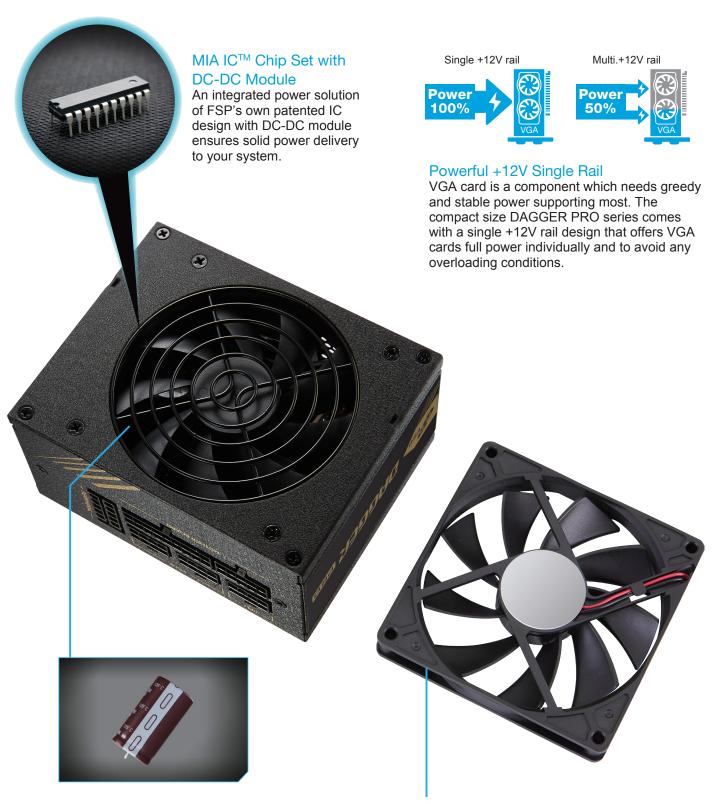

Japanese Capacitors

Japanese electrolytic capacitors endure over 100 °C degree temperature, it ensures safety on spare parts for prolong lifespan and reliability.

Semi-fanless Design with 92mm Fan

An advanced semi-fanless design will spin over 20% loading that makes optimal cooling and reduces noise under maximum operation.




550W / 650W / 750W / 850W

Product Overview



SFX to ATX Adapter Bracket It helps you easily install an SFX power supply into an ATX, Micro-ATX or Mini-ITX chassis.





Perfectly Supports Z390 Motherboard | RTX2080 VGA

The DAGGER PRO features with 2 sets of CPU 4+4 and PCI-E connectors to support high-end motherboard or RTX2080 VGA with supremely stable power.

2013 ErP/EuP Ready

The total AC power consumption of the completed system is less than 0.3W in standby mode.





Full Modular Design with Ribbon Cable

Neat build and easy installation enhance cooling performance.



550W / 650W / 750W / 850W

Product Overview





Innovative cooling layout

What is the distraction of developing high wattage SFX PSU? It's the heat.

First of all, DAGGER PRO series uses Japanese electrolytic capacitors to build the foundation for high temperature resistance, and uses innovative PCB board circuit design for transformers and inductance components that are most prone to high temperatures to form natural heat dissipation air ducts from the inside out to eliminate waste heat. Improve the endurance of the power supply and break through the limitations of small size, high waste heat, and small wattage, so that the SFX size power supply can reach 850W / 750W power output.


Tiny but powerful


It conforms to the standard small form factor size (125 x 100 x 63.5mm) and provides the highest 850W power output in the industry, demonstrating FSP's high power density R&D technology capabilities.





550W / 650W / 750W / 850W


Performance






















550W / 650W / 750W / 850W

Rating

550W

AC Input	100-240V~, 8-4A ,50-60Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5Vsb
Max Output Current	20A	22A	45A	0.3A	2.5A
Max Combined Power	120W		540W	3.6W	12.5W
Total Power			550W		

650W

AC Input	100-240V~, 10-5A ,50-60Hz				
DC Output	+3.3V	+5V	+12V	-12V	+5Vsb
Max Output Current	20A	22A	54A	0.3A	2.5A
Max Combined Power	120W		648W	3.6W	12.5W
Total Power	650W				

750W

	100-240V~, 10-6A ,50-60Hz (not for china)				for china)
AC Input	200-240Vac 6A 50-60Hz			(Only for china)	
DC Output	+3.3V	+5V	+12V	-12V	+5Vsb
Max Output Current	20A	22A	62.5A	0.3A	3A
Max Combined Power	120W		750W	3.6W	15W
Total Power	750W				

850W

	100-240V~, 10-6A ,50-60Hz (not for china			for china)	
AC Input	200-240Vac 6A 50-60Hz		(Only for china)		
DC Output	+3.3V	+5V	+12V	-12V	+5Vsb
Max Output Current	20A	22A	70.83A	0.3A	3A
Max Combined Power	120W		850W	3.6W	15W
Total Power	850W				



550W / 650W / 750W / 850W

Specifications



	550W	650W
Model	SDA2-550	SDA2-650
Туре	SFX	SFX
PFC	Active PFC	Active PFC
Input Voltage	100-240V	100-240V
Input Current	8-4A	10-5A
Input Frequency	50-60Hz	50-60Hz
Output Capacity	550W	650W
Max. Output Power	550W	650W
Fan Type	ball bearing fan,92mm	ball bearing fan,92mm
Efficiency	90%	90%
MTBF	200,000 Hrs	200,000 Hrs
Protection	OCP, OVP, SCP, OPP, OTP	OCP, OVP, SCP, OPP, OTP
Weight	1.45 kg	1.52 kg
Dimension(L×W×H)	125 × 100 × 63.5 mm	125 × 100 × 63.5 mm



550W / 650W / 750W / 850W

Specifications



	750W	850W
Model	SDA2-750	SDA2-850
Туре	SFX	SFX
PFC	Active PFC	Active PFC
Input Voltage	100-240V	100-240V
Input Current	10-6A	12-6A
Input Frequency	50-60Hz	50-60Hz
Output Capacity	750W	850W
Max. Output Power	750W	850W
Fan Type	ball bearing fan,92mm	ball bearing fan,92mm
Efficiency	90%	90%
MTBF	200,000 Hrs	200,000 Hrs
Protection	OCP, OVP, SCP, OPP, OTP	OCP, OVP, SCP, OPP, OTP
Weight		
Dimension(L×W×H)	125 × 100 × 63.5 mm	125 × 100 × 63.5 mm

FSP DAGGER PRO Series

550W / 650W / 750W / 850W

Connectors


	550W	650W	750W	850W
	1	1	1	1
20+4 PIN				
	1	1	2	2
4+4 PIN				
	0	1	0	0
8 PIN				
	2	2	4	4
6+2 PIN				
	5	5	5	5
SATA				
	2	2	2	2
MOLEX				
	1	1	1	1
FLOPPY				



550W / 650W / 750W / 850W

Cable Length

550W

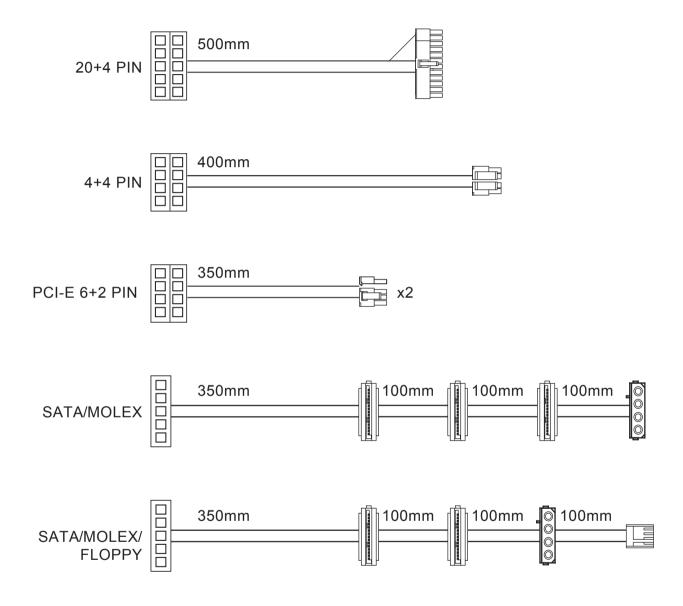




550W / 650W / 750W / 850W

Cable Length

650W

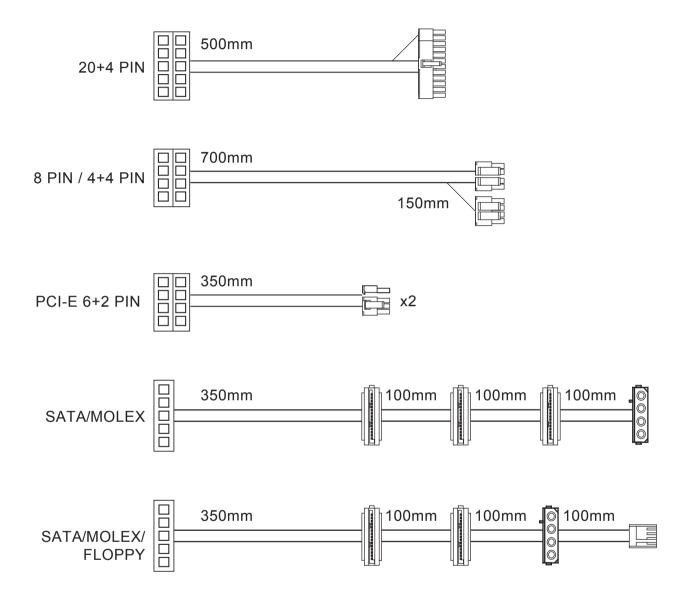




550W / 650W / 750W / 850W

Cable Length

750W / 850W

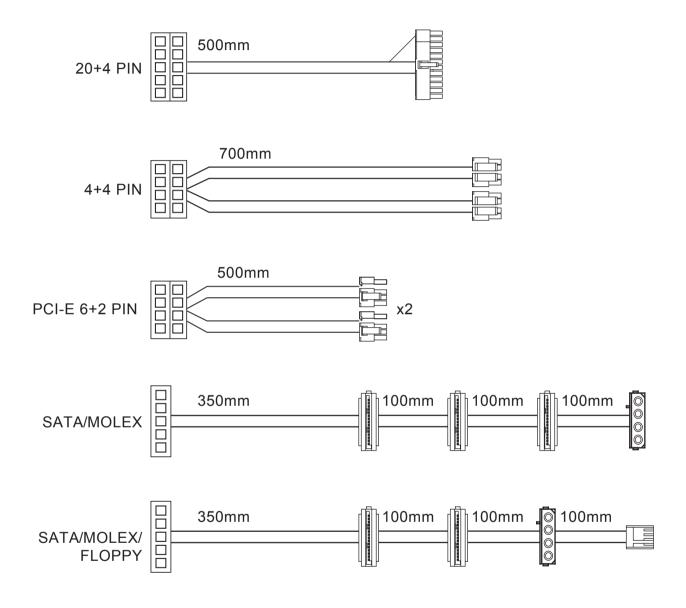



550W / 650W / 750W / 850W

Package Information

Model	SDA2-550	SDA2-650		
EAN Code	471322452206 2	471322452205 5		
UPC Code	84568501027 8	84568501026 1		
Shipping Dimensions (L×W×H)	184 × 236 × 106 mm			
Shipping Weights	1.89 kg	1.96 kg		
Master Pack Dimension (L×W×H)	559 × 500 × 203 mm			
Master Pack Quantity	10 retail boxes per master package			
Master Pack Weight	18.91kg 19.62kg			
Pallet Quantity	200			
Country of Origin	China			
Warranty	7 Years			
Additional Information	550W http://www.fsplifestyle.com/en/product/DAGGERPRO550W.html 650W http://www.fsplifestyle.com/en/product/DAGGERPRO650W.html			



550W / 650W / 750W / 850W

Package Information

Model	SDA2-750	SDA2-850	
EAN Code	471322452546 9	471322452547 6	
UPC Code	84568501263 0	84568501264 7	
Shipping Dimensions (L×W×H)	184 × 236 × 106 mm		
Shipping Weights			
Master Pack Dimension (L×W×H)	559 × 500 × 203 mm		
Master Pack Quantity	10 retail boxes per master package		
Master Pack Weight			
Pallet Quantity	200		
Country of Origin	China		
Warranty	10 Years		
Additional Information	750W http://www.fsplifestyle.com/en/product/DAGGERPRO750W.htm 850W http://www.fsplifestyle.com/en/product/DAGGERPRO850W.htm		